




BEIJING BED-TECH MANUFACTURE CO., LTD

Name	Coaxial Switching	Isolation	$\geq 65\text{dB}$
Model	RL318-01	Switching time	$< 1.0\text{s}$
Controlling method	Manual and automatic	Body case material	Electronickelling coated copper
Average power	DC-880MHz($\leq 25\text{kW}$) DC-2MHz($\leq 100\text{kW}$)	Weight	11kg
Connectors	4×3 1/8"EIA Flanged	Amounting support	Vertical
Frequency range	DC-880MHz	Operating voltage/Frequency/Current	220V/50Hz/0.5A
VSWR	≤ 1.08	Interlock output connector	1) Interlock of main and backup transmitter: 2 PIN 2) Interlock of dummy load: 2 PIN
Insertion loss	$\leq 0.1\text{dB}$	Interlock tiqian protection time	0.1s
Position indicator	Two sets of indicator	Controlling method	Local/Remote
Dummy load estate	One set of indicator	Switching power supply	One set of Switches
Transmitter interlocking A/B	2 PIN/transmitter	Dummy load interlocking	2 PIN
Outside switching controlling	4 PIN	Remote position status	4 PIN
Remote dummy load status	2 PIN	Controller dimension	19 Inches 1U

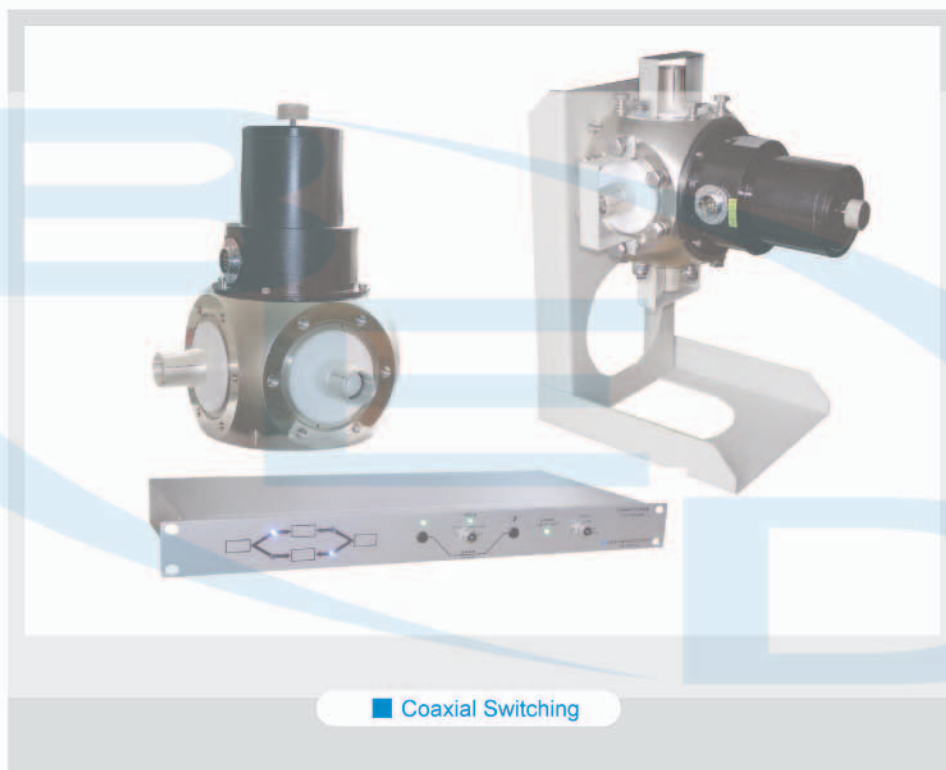